


# OWNER'S MANUAL

---

Before operating, please read this manual completely.

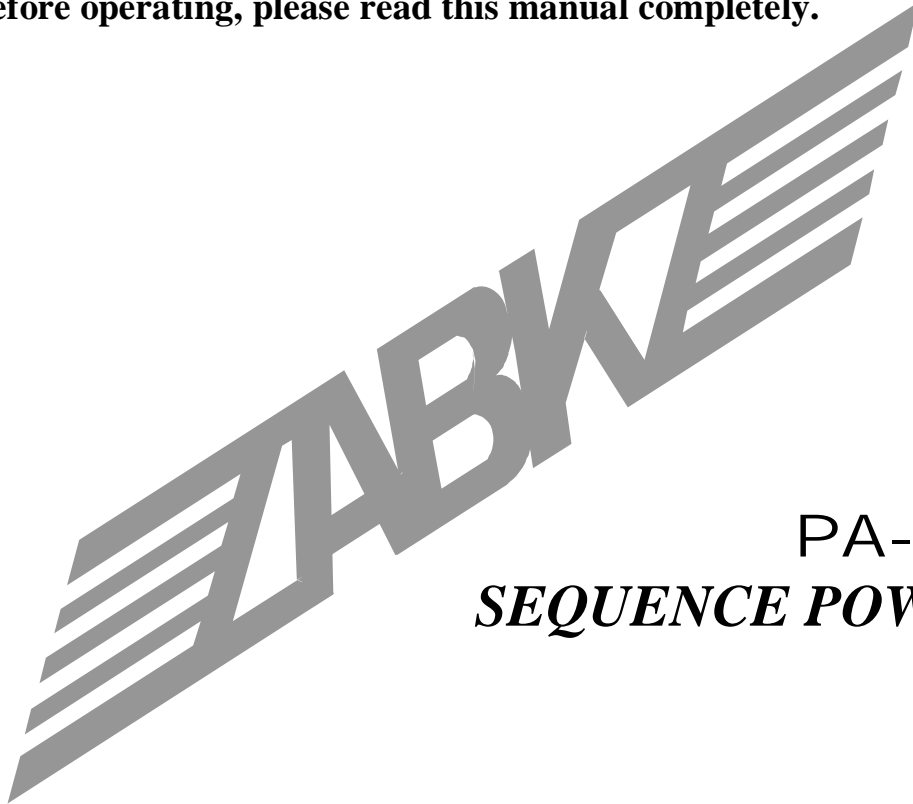

## PA-2090S *SEQUENCE POWER SET*




### ***FEATURES***

- | **Sequentially switching power supply for 16 channels;**
- | **Auto controlled by a timer or manual operates;**
- | **4.5KVA of capacity available.**

Left blank for memo



## FRONT PANEL

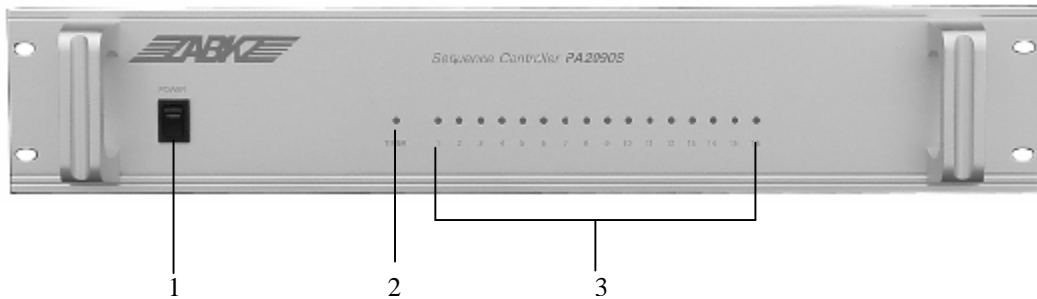

- 1 Power Switch (1 is power on and the “power LED” is on )
- 2 Timer control Indicator
- 3 Output Indicators


## REAR PANEL




- ① Power supply outlet
- ② Timer Input
- ③ Timer link
- ④ Fuse
- ⑤ Mains Cable

## CONNECTIONS

EXAMPLE 1: Switching ON or OFF sequentially for an electrical audio system.

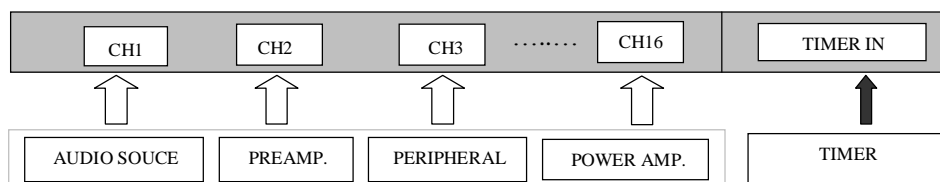

EXAMPLE2: For sequentially switching a series of power amplifiers.

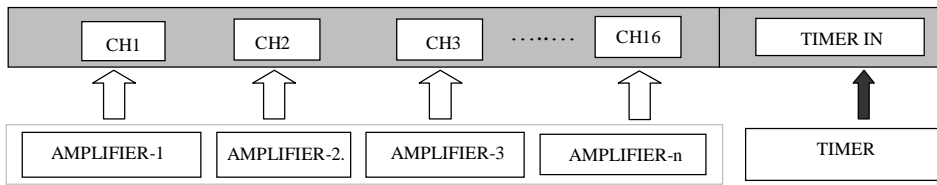

## OPERATION

1. Make connections correctly. Notice: The power cable must be connected to the main power directly.
2. Switch ON the “power” switch on front panel, the devices under controlled will be switched one by one. Note: In this case, the timer should be disabled.
3. By a timer control, the devices under control will be switched one by one automatically in time. Note: In this case, must set the “power” switch off.

## SPECIFICATIONS

<b>Capacity</b>	Total 4.5KVA, 16 channels, 220V, 10A / channel
<b>Timer In signal</b>	0V (short circuit)
<b>Step time</b>	0.4s~0.5s
<b>Power Requirement</b>	AC 220 –240 V / 20A 50~60 Hz
<b>Dimensions</b>	485×88×378 mm
<b>Gross weight</b>	6.5 kg
<b>Net weight</b>	5.2 kg

Specifications are subject to be changed without notice.

### CAUTION

- When the “Power switcher” is off, please pull out the power cord from the socket.
- Please keep the equipment out of water.
- To reduce the risk of electric shock, do not remove the cover.
- No user parts inside. Refer servicing to qualified service personnel.