



## Ovi 12

El Ovi 12 es un altavoz único y versátil. El Ovi 12 se puede montar en paredes, empotrar en estructuras de techos o suspenderse como un altavoz colgante. Todo con la claridad y potencia de un verdadero sistema de dos vías.

Incluyendo un altavoz coaxial de 12" alojado en un ligero armazón de polipropileno, el Ovi 12 se puede utilizar para proporcionar una excelente inteligibilidad de la palabra y una completa y rica reproducción musical, en espacios como restaurantes, discotecas, tiendas, centros de culto y salas de convenciones. Dispone de una amplia variedad de accesorios para facilitar su instalación.

The Ovi 12 is a unique and versatile loudspeaker system. The Ovi 12, can be mounted on walls, placed in ceiling structures, or suspended as a pendant speaker. All with the clarity and power of a true two-way loudspeaker system.

Comprising a 12" coaxial loudspeaker housed within a light-weight polypropylene shell, the Ovi 12 can be used to deliver excellent speech intelligibility and full, rich music reproduction in spaces such as restaurants, night clubs, retail spaces, houses of worship, and convention facilities. A wide variety of accessories are available to facilitate installation.



[www.dasaudio.com](http://www.dasaudio.com)

**D.A.S. Audio, S.A.**  
C/ Islas Baleares, 24  
46988 Fuente del Jarro  
Valencia - Spain  
Tel. +34 961 340 860

**D.A.S. Audio of America, Inc.**  
6900 NW 52nd Street  
Miami, FL 33166 - U.S.A.  
Toll Free: 1 888 DAS 4 USA

**D.A.S. Audio Asia PTE. LTD.**  
3 Temasek Avenue, Centennial Tower #34-36  
Singapore 039190  
Tel. +65 6549 7760



## ESPECIFICACIONES/SPECIFICATIONS


Model	<i>Ovi 12</i>
RMS (Average) Power Handling <sup>(1)</sup>	300 W
Peak Power Handling	1200 W
Frequency Range (-10 dB)	63 Hz - 20 kHz
Nominal Impedance	8 ohms
Sensitivity 1 W/1 m	96 dB SPL
Rated Maximum Peak SPL at 1 m	130 dB
Beamwidth	90° Conical
Enclosure Material	Polypropylene
Color/Finish	Black or White/Textured
Transducers/Replacement Parts	12MX LF: GM-12MI / HF:GM M34
Connectors	Push Terminals
Dimensions (Diameter x Depth)	50 x 29 cm 19.7 x 11.42 in
Weight	10.8 kg (23.8 lb)
Accessories	AXC-Ovi12-60 AXC-Ovi12-120 AXW-Ovi12

(1) Based on a 2 hour test using a continuous 6 dB crest factor pink noise signal band limited according to IEC 268-1 (1985).

## ACCESORIOS / ACCESSORIES


### AXC-Ovi12-60

Soporte de placa de techo estándar 60 cm x 60 cm  
60 cm x 60 cm standard ceiling tile support

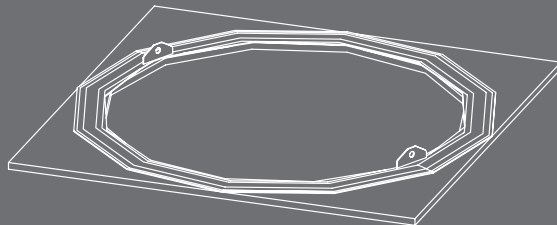

### AXC-Ovi12-120

Soporte de placa de techo estándar 120 cm x 60 cm  
120 cm x 60 cm standard ceiling tile support

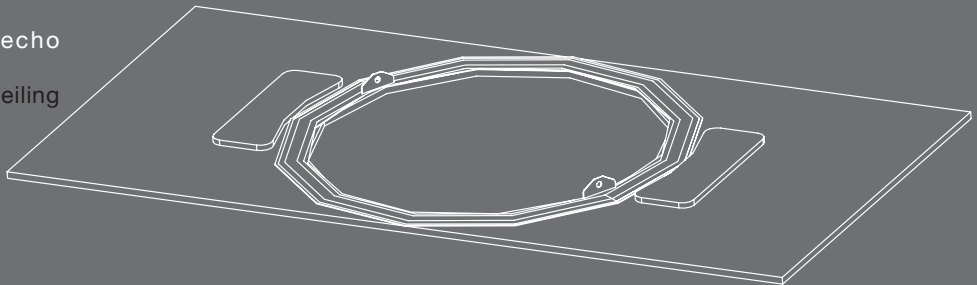

### AXW-Ovi12

Soporte de pared basculante  
Pivoting wall mount

