

# WR-8826

## TWO-WAY WEATHER RESISTANT LOUDSPEAKER SYSTEM



- >> Two-way weather resistant loudspeaker system
- >> 2 x 6" cone speaker
- >> 1" compression driver with constant directivity horn
- >> 200 W RMS power handling
- >>Stainless steel screws and grille

The D.A.S. WR-8826 is a two-way loudspeaker system for applications covering speech reinforcement, program reproduction and live music productions specially designed to be used outdoors due to its specific treatments against dust, water and humidity.

The Low Mid range utilizes two high efficiency 6" low frequency speaker with 32mm voice coil.  
The High end makes use of a 1" annular diaphragm compression driver coupled to a 80° x 80° horn.

The enclosure is manufactured from Birch Plywood and it can be ordered in two different special finishings; CX consists of Polyurea paint which is intended for covered areas and DX which consists of a fiberglass finish intended for non covered areas (system directly exposed to weather conditions).The trapezoidal enclosure has 15° side angles for easier rigging.

The unit has a robust stainless steel grille design specially covered with foam and a hydrophobic cloth to prevent and protect the loudspeaker components. The covering is resistant to wear and tear and provides protection from dust and dirt as well.

14 integrated rigging points that accept 10M forged steel eyebolts make suspension in either the horizontal or vertical positions safe and simple. The D.A.S. WR-8826 can be also installed using its specific stainless steel U-bracket AXU-WR26 or the wall mount bracket AXW-1.


The back connection panel uses covered barrier strip terminals and is protected by a stainless steel junction box.

Intended for Auditoriums, Theaters, Worship Centres, Sports Facilities, Live Clubs, Themed Entertainment Venues or Public Buildings and Schools.

### Technical Specifications

RMS (Average) Power Handling <sup>a</sup> :	200 W
Program Power Handling <sup>b</sup> :	400 W
Peak Power Handling <sup>c</sup> :	800 W
On-axis Frequency Range:	70 Hz - 22 kHz
Nominal Impedance:	16 Ohm
Minimun Impedance:	6.7 Ohm at 8320 Hz
On-axis Sensitivity, 1w/1m:	93 dB SPL
Rated Peak SPL at Full Power:	122 dB SPL
Nominal -6dB Beamwidths:	80° Horizontal x 80° Vertical
Enclosure Material:	Birch Plywood
Color/Finish:	Black or White
Transducers/Replacement Parts:	LF: 2 x 6B/6B HF: M-1/M-1
Weather Resistant Level:	Covered Exposure (CX) Direct Exposure (DX)
Connector:	Covered Barrier Strip
Dimmensions (H x W x D):	54.5 x 22.6 x 26.7 cm 21.5 x 8.9 x 10.5 in
Weight:	10 kg (22 lb)
Accessories:	AXU-WR26 AXW-1


### Dimensions

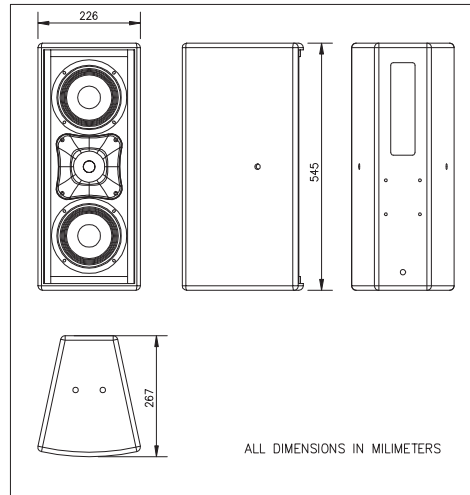

<sup>a</sup> Based on a 2 hour test using a 6dB crest factor pink noise signal.  
<sup>b</sup> Conventionally, 3dB higher than the RMS measure, although this already utilizes a program signal.  
<sup>c</sup> Corresponds to the signal crests for the test described in <sup>a</sup>.


**Frequency Response**

Shows the frequency response at 1 m of a unit radiating to an anechoic environment (4 ) and driven by a 1 W (4 V) swept sine signal, and impedance curve. For better detail, only light smoothing (1/12th octave) has been used.

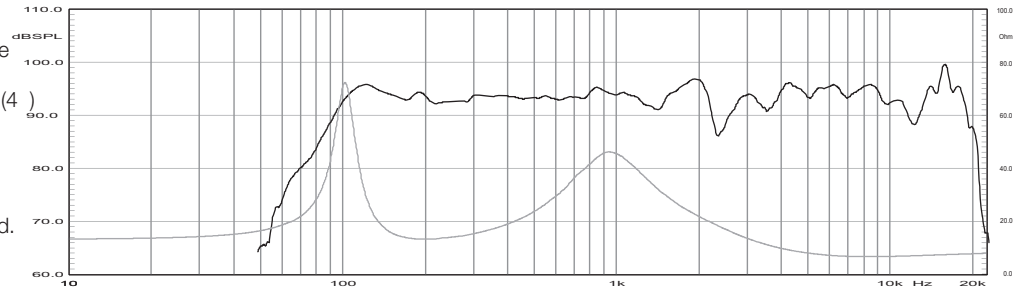


**Distortion**

Shows the Second Harmonic Distortion (grey) and Third Harmonic Distortion (dotted) for a unit driven at 10% of its nominal power handling rating.

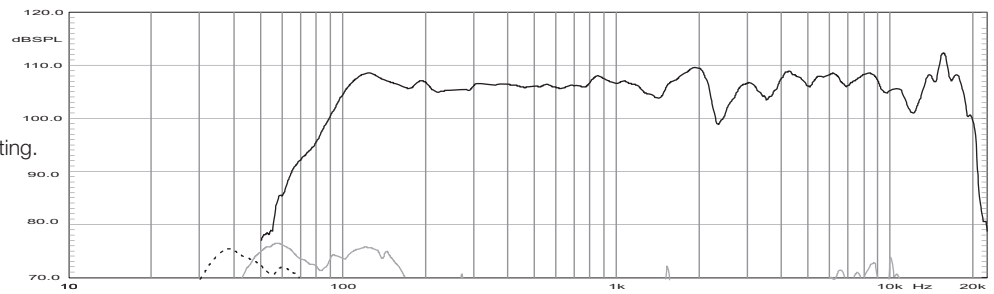


**Directivity**

Shows normalized horizontal isobar plot.

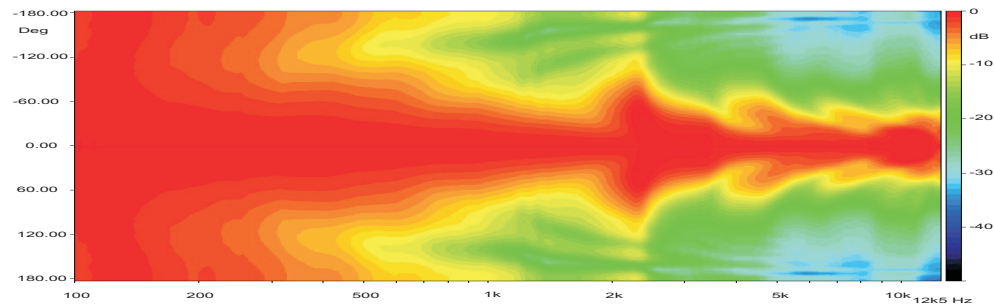


**Directivity**

Shows normalized vertical isobar plot.

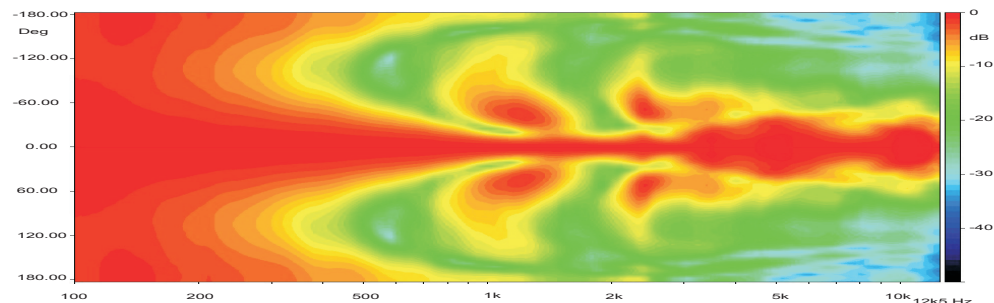

**Polar Response**

1/3 octave band horizontal (left) and vertical (right) polars for the indicated frequencies. Full scale is 30dB, 6dB per division.

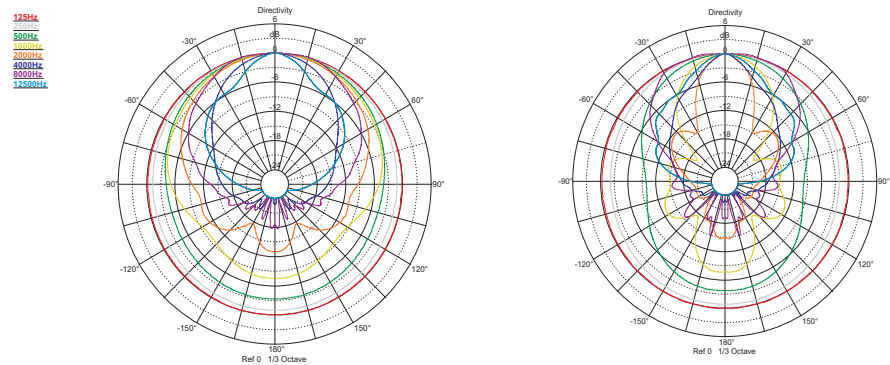

NOTES: Frequency response measured at 4m (13.12ft) and referred to 1m. For better detail, only light smoothing (1/12th octave) has been used. Polars were acquired by placing the unit on a computer controlled turntable inside a 300 m<sup>3</sup> (10594 ft<sup>3</sup>) anechoic chamber. Measurement distance is 4m (13.12ft).

Product improvement through research and development is a continuous process at D.A.S. Audio. All specifications subject to change without notice.



**D.A.S. Audio S.A.**  
 C/ Islas Baleares, 24  
 46988 Fuente del Jarro  
 Valencia - SPAIN  
 Tel. 961 340 525 - Tel. Intl. +34 961 340 860  
 Fax 961 340 607 - Fax Intl. +34 961 340 607

**D.A.S. Audio of America Inc.**  
 Sunset Palmetto Park - 6816 NW 77th Court  
 Miami, FL. 33166 U.S.A.  
 Tel. 305 436 0521 - Fax. 305 436 0528  
 Toll Free: 1 888 DAS 4 USA

**D.A.S. Audio Asia Pte. Ltd.**  
 25 Kaki Bukit Crescent # 01-00/ 02-00  
 Kaki Bukit Techpark I - Singapore 416256  
 Co. Reg. No. 200704134E  
 Tel. +65 6742 0151 - Fax. +65 6742 0157

[www.dasaudio.com](http://www.dasaudio.com)